

Atlas Copco

W2411
Impact Wrench

Smart Qic
& Multiflex

W2915
Impact Wrench

W2428
Impact Wrench

W2415
Impact Wrench

Tools by Atlas Copco

Screws and nuts drive you... Nuts.
To master this fully we have put almost 145 years into developing our tools.
All the expertise, know-how and innovations we have picked up along
the way go into every tool we build, and can then be added to your project.

BRING A CENTURY OF EXPERIENCE TO YOUR PROJECT

ATLAS COPCO PRO-series

W2915
8434 1248 52



Powerful impact for fast run down and four torque settings

- 1/2" square drive
- 200-800Nm
- 1000Nm reverse torque
- 1.98kg
- 6.3 bar
- 18 l/s

2 700:-


W2428
8434 1248 60



W2428 features a robust housing and can handle tough environments providing fast rundown and tightening

- 1"
- 800Nm-1600Nm
- 2800Nm reverse
- 10.5 kg
- 6.3 bar
- 50 l/s

9 300:-

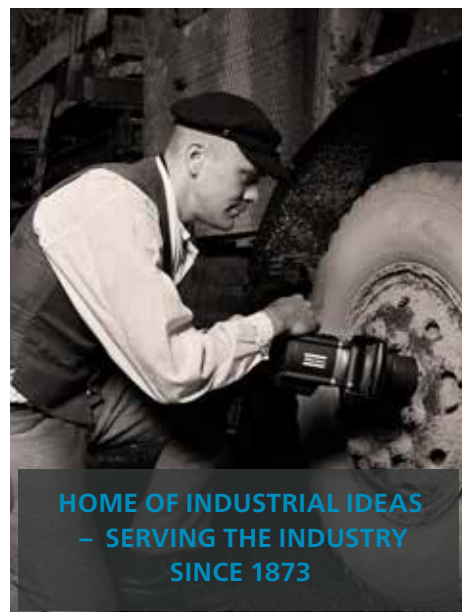

HOME OF INDUSTRIAL IDEAS
– SERVING THE INDUSTRY
SINCE 1873

W2630
8431 0350 30



Perfect for narrow spaces and quick tightening

- 1/2"
- 25-80Nm
- 1.2kg
- 6.3bar
- 11l/s

2 200:-

W2920
8434 1248 53



Powerful impact for fast run down and four torque settings

- 3/4" square drive
- 300-1450 Nm
- 1500Nm max reverse
- 3.24
- 6.3 bar
- 27 l/s

5 900:-

D2163
8421 0410 08



You can rely on the all-metal drill to deliver superior hole quality in your most demanding applications due to its high spindle accuracy and lube-free motor.

- 2000rpm
- Chuck capacity 1.5-10mm
- 1.1 kg
- 330W
- 9.3l/s

4 300:-

D2160
8421 0410 16

Designed with operator comfort in mind, the PRO Pistol Drill D21 offers speed, power, accuracy, and a smooth quiet operation

- 2400rpm
- Chuck capacity 1.5-10mm
- 0.85 kg
- 460W power
- 11l/s

2 900:-



Contact your Atlas Copco Distributor to buy these tools

All price are recommended campaign prices in SEK excluding VAT.
Offers valid 2022-01-01 - 2022-06-30

G2420

8423 0304 20

Belt sander for precision sanding. Head rotation ensures versatile solution for many applications.

- 1500rpm
- 350W
- 19x520mm belt dimension
- 1kg
- 6.3 bar
- 11l/s



3 500:-



Grit size

	40+	60+	80+	120+	Price
G2410 Sanding belt					
20 pcs, 6 x 305 mm (1/4"x12")	4170 1208 00	4170 1208 02	4170 1208 03	4170 1208 04	490:-
20 pcs, 13 x 305 mm (1/2"x12")	4170 1208 05	4170 1208 06	4170 1208 07	4170 1208 08	490:-
G2420 Sanding belt					
20 pcs, 19 x 520 mm (3/4"x20-1/2")	4170 1208 13	4170 1208 14	4170 1208 15	4170 1208 16	1100:-



G2410

8423 0304 10

Belt sander for precision sanding. Head rotation ensures versatile solution for many applications.

- 1400rpm
- 275W
- 13x305mm belt dimension
- 1 kg
- 6.3bar
- 11l/s



2 950:-

G2407-M14

8423 0304 55

Super slim tool for polishing fine sanding applications.

- M14 spindle
- 12mm spindle length
- 200mm max pad size
- 350W
- 1.4 kg
- 6.3bar
- 10l/s



5 600:-

G2451

8423 0313 01

Vertical grinder for rough grinding and cutting off operations

- 8500rpm
- Max 180mm wheel
- 1100W
- UNC5/8" spindle thread
- 30mm spindle length
- 2.7kg
- 6.3 bar
- 21l/s



1 800:-

C1050

8424 1110 50

Cut through most materials with ease. Due to its gear mechanism the tool will not stall as a conventional air saw commonly do.

- 5mm stroke length
- 10500 strokes per minute
- 0.52kg
- 6.3 bar
- 2.2l/s



2 600:-

G2412-1

8423 0312 21

Robust die grinder for grinding and finishing in general industry.

- 6mm collet
- 20000rpm
- 350W
- 178mm length
- 0.5kg
- 6.3bar
- 13l/s




2 200:-

G2422-1

8423 0312 47

Robust extended die grinder for grinding and finishing in general industry.

- 6mm collet
- 20000rpm
- 350W
- 277mm length
- 0.7kg
- 6.3bar
- 13l/s

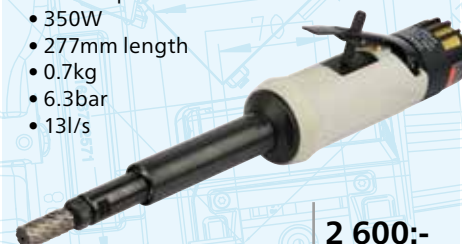

2 600:-

All price are recommended campaign prices in SEK excluding VAT. Offers valid 2022-01-01 - 2022-06-30

Contact your Atlas Copco Distributor to buy these tools

THE YELLOW CORNER – grinding & sanding

DIE GRINDERS

Professional die grinders for industrial applications where ergonomics, power and durability is of utmost importance.

Features

- Scatter damping
- Impressive power to weight ratio
- Integrated speed governor
- Built-in silencer for noise reduction
- Exhaust hose included

Benefits

- Reduced risk of vibration related injuries
- High productivity and short process time
- Optimized process speed
- Reduced noise levels
- High durability and long service life



LSF12



LSF19



LSF39



LSF29



LSV12



LSV19

ANGLE DIE GRINDERS

Equipped with a powerful air motor and a speed governor, giving the best sanding experience. Ergonomically designed with the option of dust extraction, the Angle Grinder LSV19 & LSV12 offers great operator comfort.

Model	Max free speed [r/min]	Max output [kW]	Collet size [mm]	Length [mm]	Weight [kg]	Air consumption at max output [l/s]	Air consumption at free speed [l/s]	Rec hose size [mm]	Air inlet thread [BSP]	Scatter damped	Ordering No.
Straight Die grinders											
LSF12 S200-1	20000	0.24	6	170	0.36	8.1	2.6	8	1/4	-	8423 1124 01
LSF12 S250-1	25000	0.29	6	170	0.36	8.5	3.4	8	1/4	-	8423 1124 02
LSF12 S310-1	31000	0.32	6	170	0.36	9.2	4.2	8	1/4	-	8423 1124 03
LSF12 S400-1	40000	0.36	6	170	0.36	9.8	7.0	8	1/4	-	8423 1124 04
LSF19 S200-1	20000	0.5	6	193	0.5	9.6	3.5	10	1/4	•	8423 1224 80
LSF19 S300-1	30000	0.5	6	193	0.5	11.3	6.6	10	1/4	•	8423 1224 81
LSF19 S460-1	46000	0.5	6	193	0.5	11.4	15	10	1/4	•	8423 1224 82
LSF29 S250E ³	25000	1	6	332	1.4	22	9	13	3/8	-	84230 127 14
LSF29 S180E	18000	0.9	6	332	1.4	20	6	13	3/8	•	84230 127 08
LSF 29 S150E	15000	0.8	6	332	1.4	18	4	13	3/8	•	84230 127 04
Straight extended die grinders											
LSF19 S300E-1	20000	0.5	6	293	0.7	11.3	6.6	10	1/4	•	8423 1224 85
LSF19 S300E-1	30000	0.5	6	293	0.7	11.3	6.6	10	1/4	•	8423 1224 86
LSF19 S460E-1	46000	0.5	6	293	0.7	11.4	15	10	1/4	•	8423 1224 87
LSF29 S250 ³	25000	1	6	213	0.8	22	9	13	3/8	-	84230 127 11
LSF29 S180	18000	0.9	6	213	0.8	20	6	13	3/8	•	84230 127 05
LSF29 S150	15000	0.8	6	213	0.8	38.1	9.3	13	3/8	-	84230 127 02
LSF29 S120	12000	0.7	6	213	0.8	36.0	7.4	13	3/8	-	84230 127 00
LSF39 S120E	12000	1.5	6	367	1.6	24	9	13	3/8	-	8423 1233 00
LSF39 S150E	15000	1.7	6	367	1.6	28	12	13	3/8	-	8423 1233 01
LSF39 S250E a	25000	1.8	6	367	1.6	33	33	13	3/8	-	8423 1233 03
Angel die grinders											
LSV12 S120-1	12000	0.24	6	166	0.54	8.3	3.0	8	1/4	-	8423 1124 05
LSV12 S200-1	20000	0.26	6	166	0.54	9.5	6.4	8	1/4	-	8423 1124 06
LSV19 S080-1	8000	0.37	6	185	0.6	11.3	6.5	10	1/4	-	8423 0111 46
LSV19 S120-1	12000	0.46	6	185	0.6	11.3	7.5	10	1/4	-	8423 0111 43
LSV19 S200-1	20000	0.46	6	185	0.6	11.3	7.5	10	1/4	-	8423 0111 41
LSV29 S150	15000	0.7	6	251	1.2	21	8	13	3/8	-	8423 0127 40



Contact your Atlas Copco Distributor for price and availability

For more info on die grinders

GTG25 F085-18



"GTG grinders, the most powerful angle grinders in the world."



For more info on GTG grinders

Features

- High power-to-weight ratio
- Advanced 2-stage turbine motor
- Ergonomic design
- Precise speed governor
- Autobalancer to minimize vibrations (grinders)
- Built-in spindle lock
- Safety trigger
- Overspeed shut-off device

Benefits

- Highest material removal rate in its class
- Oil free operation
- Minimum sound levels
- Reduced risk of vibration related injuries
- Great operator comfort for easy handling

Model	Max free speed [r/min]	For wheel dia [mm]	Spindel thread	Max output [kW]	Weight [kg]	Height over spindle [mm]	Air consumption at		Rec. hose size [mm]	Air inlet thread [BSP]	Ordering No.
							max output [l/s]	free speed [l/s]			
For grinding and cutting off											
GTG25 F120-13	12000	125	-	2.5	2.1	59	32	9	16	3/8	8423 2525 01
GTG25 F120-M14	12000	125	M14	2.5	2.1	59	32	9	16	3/8	8423 2525 10
GTG25 F120-5/8	12000	125	UNC 5/8	2.5	2.1	59	32	9	16	3/8	8423 2525 12
GTG25 F085-18	8500	180	-	2.5	2.2	59	32	9	16	3/8	8423 2525 02
GTG25 F085-M14	8500	180	M14	2.5	2.2	59	32	9	16	3/8	8423 2525 11
GTG25 F085-5/8	8500	180	UNC 5/8	2.5	2.2	59	32	9	16	3/8	8423 2525 13
For Sanding											
GTG25-S085	8500	180	5/8-11	2.5	2.0	59	32	9	16	3/8	8423 2525 03
GTG25-S085-M14	8500	180	M14	2.5	2.0	59	32	9	16	3/8	8423 2525 04
GTG25-S060	6000	230	5/8-11	2.5	2.0	59	32	9	16	3/8	8423 2525 20
GTG25-S060-M14	6000	230	M14	2.5	2.0	59	32	9	16	3/8	8423 2525 21



LSV39 S085-M14

LSV39 S085-M14

Regular spindle or short spindle

Your best friend when sanding!

The Pneumatic Angle Sander LSV39 is a small and lightweight yet very powerful tool. Suitable for medium to rough sanding, the LSV39 comes with a speed governor to ensure optimum process speed. It offers great accessibility in cramped and narrow spaces. The extra durable angle gear requires minimum lubrication. It has the possibility to utilize dust extraction for improved health and safety.



For more info on LSV39 grinders and sanders

Model	Max free speed [r/min]	Max output [kW]	Max wheel pad dia [mm]	Weight [kg]	Spindel thread	Spindel length [mm]	Max Output [l/s]	Free speed [l/s]	Rec hose size [mm]	Air inlet thread [BSP/NPT]	Ordering No.
Angel sander											
LSV39 S085-5/8	8500	1.8	180	1.6	5/8-11 UNC	28	29.5	16.3	13	3/8	8423 0133 03
LSV39 S085-M14	8500	1.8	180	1.6	M14	28	29.5	16.3	13	3/8	8423 0133 04
LSV39 S066-5/8	6600	1.6	180	1.6	5/8-11 UNC	28	26.2	11.6	13	3/8	8423 0133 05
LSV39 S066-M14	6600	1.6	180	1.6	M14	28	26.2	11.6	13	3/8	8423 0133 06
LSV39 S120-5/8	12000	1.8	125	1.6	5/8-11 UNC	28	29.8	17.6	13	3/8	8423 0133 07
LSV39 S085-M14S	8500	1.8	180	1.6	M14	19	29.5	16.3	13	3/8	8423 0133 11

Contact your Atlas Copco Distributor for price and availability

PRO ACTW Torque Wrenches

Technical data

Model	Drive square [in]	Torque range [Nm]	Weight [kg]	Length [mm]	Part Number	Price
ACTW05	1/4"	5-25	0.4	248	8434 0300 01	1 650:-
ACTW20	3/8"	20-100	1.2	408	8434 0300 02	1 650:-
ACTW40	1/2"	40-200	1.6	519	8434 0300 03	1 650:-
ACTW150	3/4"	150-750	5.72	1124	8434 0300 04	6 100:-
ACTW200	1"	200-1000	6.52	1224	8434 0300 05	7 500:-

Accessories



WS1001 | 290:-



WS1002 | 350:-



WS1003 | 620:-

Model	Square drive size [in]	Socket type	Number of sockets	Sockets include [mm]	Ordering No.	Price
PRO WS1001	3/8"	Metric impact socket	13	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	4112 0607 91	290:-
PRO WS1002	1/2"	Metric impact socket	12	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27	4112 0607 92	350:-
PRO WS1003	1/2"	Metric deep impact socket	14	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27	4112 0607 93	620:-

All prices are recommended campaign prices in SEK excluding VAT. Offers valid 2022-01-01 - 2022-06-30

Manual torquing at its best

Atlas Copco PRO Torque Wrenches are manufactured to meet global standards of accuracy for customer torquing needs.

The series can be used as a stand-alone product or together with Atlas Copco Impact Wrenches to ensure that the correct torque has been applied for non-critical applications.

All of these click type torque wrenches come with a quality ratchet head that provides a distinctive and audible click sound. The series comes in different models covering a torque range of 5-1000 Nm. The series provides a $\pm 4\%$ accuracy based on the EN ISO 6789-1:2017 standard.



Benefits

- Easy to reach cramped spaces
- Durable aluminium handle for easy operator handling
- Audible click sound for realtime operator feedback
- Up to 25,000 cycles

Pneumatic Scaler

RVM08B

8425 0105 40

The New Pneumatic Scaler RVM08B is the obvious choice for light concrete trimming and for removal of welding slag, paint and rust from steel structures.

Features

- Unique vibration damping system
- Low noise level
- Clean-blowing device
- Lightweight robust aluminium alloy casing
- Quick change retainer

Benefits

- Less exposure to vibrations
- Less exposure to noise
- Two-job capacity
- Sturdy design that is easy to maintain
- Easy to change chisel



Contact your Atlas Copco Distributor for price and availability

ACCESSORIES

Blow Gun BG-series

High flow capacity.

- Suspension.
- Plastic body to avoid scratches.
- Air inlet thread in brass.
- Star tip availability for improved safety.
- Complies with OSHA STD1-13.1 and OSHA 1910.95



8202 1006 04 | 140:-
8202 1006 05 | 130:-
8202 1006 06 | 150:-
8202 1006 07 | 190:-

TURBO 13

9093 0057 91

Super-light flexible rubber hose

- Extremely low weight.
- Soft and flexible.
- Antistatic.
- Grinding and welding spatter resistant.
- Working temperature: -30°C to +70°C.
- 20m coil
- max air flow 21l/s
- hose inside diameter 13mm



2 300:-

Atlas Copco Optimizer air tool oil

for lubricating pneumatic tools.

- Provides a better working environment.
- Excellent antiwear properties.
- Minimizes wear on components.



Extends tool life

9090 0000 02 - 0,5l - 105:-
9090 0000 04 - 1l - 165:-
9090 0000 06 - 4l - 610:-

HM OPEN 12-15

8202 1183 36

- Spatter resistant rubber hose.
- Outlet roller position can be adjusted through 120 degrees for optimal pull-out angle.
- Hose end provided with steel spiral hose protector
- Latch function is easily disengaged.
- Spring tension is easily adjusted.
- Floor, wall or ceiling mounting.
- Working temperature: -10°C - +60°C.
- Max working pressure: 15 bar.
- Inlet hose length: 1 m.
- Max air flow capacity 17l/s
- Hose length 15m
- Connection distribution hose 1/2"



5 500:-

HM LIGHT 10-10

8202 1183 32

- Snap-on, pivoting wall bracket.
- PVC/PUR hose.
- Hose end provided with pressed fitting
- Hose easily replaced when needed.
- Drum with ball bearings on both sides.
- Working temperature: 0°C - +50°C.
- Inlet hose length: 1 m.
- Max airflow capacity 10l/s
- Hose length 10m
- Max working pressure 15bar
- Inlet hose inside diameter (cut of hose) 10 mm
- Connection distribution hose 3/8"



2 400:-

HM OPEN XL 19-15

8202 1183 39

- Spatter resistant rubber hose.
- Floor, wall or ceiling mounting.
- Revolving hinge for flexible use.
- Working temperature: -10°C - +60°C.
- Max working pressure: 15 bar.
- Inlet hose length: 1 m.
- Max air flow capacity 44l/s
- Connection distribution hose 3/4"
- Hose length 15m



11 000:-

MultiFlex swivel

- Ergonomic.
- Reduces hose wear.
- High flow capacity.
- Minimum pressure drop.
- Strong and durable.



Model	Max rec. air flow ³ [l/s]	Inlet female [in]	Thred		Weight [g]	Lengt [mm]	Dia [mm]	Ordering No.	Price
			Outlet male [in]						
Standard									
MultiFlex 1/8" BSP	12	1/8	1/8		73	66.2	24	8202 1350 18	690:-
MultiFlex 1/4" BSP	12	1/4	1/4		73	66.2	24	8202 1350 20	690:-
MultiFlex 3/8" BSP	32	3/8	3/8		130	80.6	29.5	8202 1350 22	910:-
MultiFlex 1/2" BSP	32	1/2	1/2		125	80.6	29.5	8202 1350 24	910:-

WE'VE SPENT 145 YEARS OF SOLVING PROBLEMS OF DIFFERENT SIZE



THE SNORKEL RULE

Do you use The Snorkel Rule when installing air tools? Imagine breathing through a straw, you will probably get dizzy due to lack of oxygen as it is difficult to breath.

Breathing through a snorkel is a completely different story – it's easy. It's the same with air tools, they don't like straw-thin air hoses and run much more efficient when they get enough air through hoses with correct dimensions. Are you unsure about the dimension of your hose?

Ask yourself:

- *Could I comfortably use it as a snorkel?*

If the answer is yes -> then go for it!



Atlas Copco

Atlas Copco
+46 8 743 90 40
kundtjanst.it@se.atlascopco.com
www.atlascopco.com/sv-se/itba

